

SPECIFICATION

DESIGNED NO: Multi USB Power Center
MODEL NO: TX-P4100QD-Gan
REVISION: V1.0
NO.OF PAGE: 11
DATE : 2024-08-08

DESCRIBED	CHECKED	APPROVED	REV.
			1.0

Shenzhen Starwell Technology Co.,Ltd.

ADD: Building C, Longbang Kexing Science Park, Guangming District, Matian
Street, Guangming District, Shenzhen.
Website: www.starwellpower.com

1.0 INPUT REQUIREMENTS

1.1 VOLTAGE:

The range of input voltage is from 100Vac to 240Vac.

1.2 FREQUENCY:

The range of input frequency is from 50Hz to 60Hz.

1.3 CURRENT:

The maximum input current is 2A.

1.4 INRUSH CURRENT:

The inrush current will not exceed 40A at 240Vac input, cold start, 25°C ;

1.5 Input Current Leakage:

when voltage is 240VAC, leak current is less than 500uA;

1.6 Power Supply Efficiency:

The efficiency (watts out / watts in) is more than 89% typical while measuring at nominal line and rated load.

1.7 NO LOAD POWER:

The power supply loss at no load operation shall be less than 0.25W at any input voltage.

1.8 Turn on delay :

During turn on and turn off, no voltage shall exceed its nominal voltage by more than 10% and no output will change its polarity with respect to its return line. All output shall reach their steady state values within 30 seconds of turn on.

2.0 OUTPUT REQUIREMENTS

2.1 USB Static load:

Load method 1: Single output static load (100W max).

Output#		Voltage	Minimum load	Maximum load
Type-C1	PD3.0 (100W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	5A
		PPS +3.3-21Vdc	0A	5A

Output#		Voltage	Minimum load	Maximum load
Type-C2	PD3.0 (100W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	5A
		PPS +3.3-21Vdc	0A	5A

Output#		Voltage	Minimum load	Maximum load
Type-C3	PD3.0 (70W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	3.5A
		PPS +3.3-11Vdc	0A	5A

Output#		Voltage	Minimum load	Maximum load
USB -A	QC3.0 (20W)	+5Vdc	0A	3A
		+9Vdc	0A	2A
		+12Vdc	0A	1.67A
		SCP +3.3-11V	0A	2A

Table 2.1.1

Load method 2: Dual port output static load (100W max)

Output#		Voltage	Minimum load	Maximum load
Type-C1	PD3.0 (70W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	3.5A
		PPS +3.3-11Vdc	0A	5A
Type-C2	PD3.0 (30W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	2.5A
		+15Vdc	0A	2A
		+20Vdc	0A	1.5A
		PPS +3.3-11Vdc	0A	3A

Output#		Voltage	Minimum load	Maximum load
Type-C1	PD3.0 (70W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	3.5A
		PPS +3.3-11Vdc	0A	5A
Type-C3	PD3.0 (30W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	2.5A
		+15Vdc	0A	2A
		+20Vdc	0A	1.5A
		PPS +3.3-11Vdc	0A	3A

Output#		Voltage	Minimum load	Maximum load
Type-C1	PD3.0 (70W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	3.5A
		PPS +3.3-11Vdc	0A	5A
USB-A	QC3.0 (20W)	+5Vdc	0A	3A
		+9Vdc	0A	2A
		+12Vdc	0A	1.67A
		SCP 3.3-11V	0A	2A

Output#		Voltage	Minimum load	Maximum load
Type-C2	PD3.0 (70W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	3.5A
		PPS +3.3-11Vdc	0A	5A
Type-C3	PD3.0 (30W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	2.5A
		+15Vdc	0A	2A
		+20Vdc	0A	1.5A
		PPS +3.3-11Vdc	0A	3A

Output#		Voltage	Minimum load	Maximum load
Type-C2	PD3.0 (70W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	3.5A
		PPS +3.3-11Vdc	0A	5A
USB-A	QC3.0 (20W)	+5Vdc	0A	3A
		+9Vdc	0A	2A
		+12Vdc	0A	1.67A
		SCP 3.3-11V	0A	2A

Output#		Voltage	Minimum load	Maximum load
Type-C3	Share (15W)	+5Vdc	0A	3A
USB-A				

Table 2.1.2

Load method 3: Three port output static load (100W max)

Output#		Voltage	Minimum load	Maximum load
Type-C1	PD3.0 (40W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	2.67A
		+20Vdc	0A	2A
		PPS +3.3-11Vdc	0A	4A
Type-C2	PD3.0 (40W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	2.67A
		+20Vdc	0A	2A
		PPS +3.3-11Vdc	0A	4A
Type-C3	PD (20W)	+5Vdc	0A	3A
		+9Vdc	0A	2A
		+12Vdc	0A	1.67A

Output#		Voltage	Minimum load	Maximum load
Type-C1	PD3.0 (40W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	2.67A
		+20Vdc	0A	2A
		PPS +3.3-11Vdc	0A	4A
Type-C2	PD3.0 (40W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	2.67A
		+20Vdc	0A	2A
		PPS +3.3-11Vdc	0A	4A
USB-A	QC3.0 (20W)	+5Vdc	0A	3A
		+9Vdc	0A	2A
		+12Vdc	0A	1.67A

Output#		Voltage	Minimum load	Maximum load
Type-C1	PD3.0 (85W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	4.25A
		PPS+3.3-11Vdc	0A	5A
Type-C3 USB-A	Share (15W)	+5Vdc	0A	3A

Output#		Voltage	Minimum load	Maximum load
Type-C2	PD3.0 (85W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	4.25A
		PPS+3.3-11Vdc	0A	5A
Type-C3 USB-A	Share (15W)	+5Vdc	0A	3A

Table 2.1.3

Load method 4: Four port output static load (100W max)

Output#		Voltage	Minimum load	Maximum load
Type-C1	PD3.0 (45W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	3A
		+20Vdc	0A	2.25A
		PPS +3.3-11Vdc	0A	4.5A
Type-C2	PD3.0 (40W)	+5Vdc	0A	3A
		+9Vdc	0A	3A
		+12Vdc	0A	3A
		+15Vdc	0A	2.67A
		+20Vdc	0A	2A
		PPS +3.3-11Vdc	0A	4A
Type-C3 USB-A	Share (15W)	+5Vdc	0A	3A

2.2 Output voltage:

The output voltage shall be statically regulated for all combinations of load, line and environment including cross regulation as shown.

Output#		Voltage/Current	Tolerance
TYPE-C1	PD	+5V/0A	+0.25V/-0.25V
		+5V/3A	+0.25V/-0.25V
		+9V/0A	+0.45V/-0.45V
		+9V/3A	+0.45V/-0.45V
		+12V/0A	+0.6V/-0.6V
		+12V/3A	+0.6V/-0.6V
		+15V/0A	+0.75V/-0.75V
		+15V/3A	+0.75V/-0.75V
		+20V/0A	+1.0V/-1.0V
		+20V/5A	+1.0V/-1.0V
TYPE-C2	PD	+5V/0A	+0.25V/-0.25V
		+5V/3A	+0.25V/-0.25V
		+9V/0A	+0.45V/-0.45V
		+9V/3A	+0.45V/-0.45V
		+12V/0A	+0.6V/-0.6V
		+12V/3A	+0.6V/-0.6V
		+15V/0A	+0.75V/-0.75V
		+15V/3A	+0.75V/-0.75V
		+20V/0A	+1.0V/-1.0V
		+20V/5A	+1.0V/-1.0V
		+5V/0A	+0.25V/-0.25V
		+5V/3A	+0.25V/-0.25V

TYPE-C3	PD	+9V/0A	+0.45V/-0.45V
		+9V/3A	+0.45V/-0.45V
		+12V/0A	+0.6V/-0.6V
		+12V/3A	+0.6V/-0.6V
		+15V/0A	+0.75V/-0.75V
		+15V/3A	+0.75V/-0.75V
		+20V/0A	+1.0V/-1.0V
		+20V/3.5A	+1.0V/-1.0V
USB -A	QC3.0	+5V/0A	+0.25V/-0.25V
		+5V/3A	+0.25V/-0.25V
		+9V/0A	+0.45V/-0.45V
		+9V/2A	+0.45V/-0.45V
		+12V/0A	+0.6V/-0.6V
		+12V/1.67A	+0.6V/-0.6V

2.3 Output Ripple and Noise:

Output#		Voltage	Maximum ripple & Noise
Type-C1	PD	+5V/3Amax	80mVp-p (Ripple)
			50mVp-p (Noise)
		+9V/3A max	120mVp-p (Ripple)
			30mVp-p (Noise)
		+12V/3Amax	150mVp-p (Ripple)
			30mVp-p (Noise)
		+15V/3Amax	150mVp-p (Ripple)
			50mVp-p (Noise)
		+20V/5A max	230mVp-p (Ripple)
			50mVp-p (Noise)
Type-C2	PD	+5V/3Amax	80mVp-p (Ripple)
			50mVp-p (Noise)
		+9V/3A max	120mVp-p (Ripple)
			30mVp-p (Noise)
		+12V/3Amax	150mVp-p (Ripple)
			30mVp-p (Noise)
		+15V/3Amax	150mVp-p (Ripple)
			50mVp-p (Noise)
		+20V/5A max	230mVp-p (Ripple)
			50mVp-p (Noise)
Type-C3	PD	+5V/3Amax	80mVp-p (Ripple)
			50mVp-p (Noise)
		+9V/3A max	120mVp-p (Ripple)
			30mVp-p (Noise)
		+12V/3Amax	150mVp-p (Ripple)
			30mVp-p (Noise)
		+15V/3Amax	150mVp-p (Ripple)
			150mVp-p (Ripple)

USB -A	QC3.0		50mVp-p (Noise)
			230mVp-p (Ripple)
		+20V/3.5A max	50mVp-p (Noise)
		+5V/3Amax	60mVp-p (Ripple)
			30mVp-p (Noise)
		+9V/2Amax	70mVp-p (Ripple)
			20mVp-p (Noise)
		+12V/1.67Amax	60mVp-p (Ripple)
			30mVp-p (Noise)

Table 2.3.1

Measurement is done by 20MHz bandwidth oscilloscope and terminated each output with a 10uF capacitor and a 0.1uF capacitor.

2.4 Temperature coefficient:

$\pm 0.05\%/^{\circ}\text{C}$ typical on all output.

3.0 PROTECTION REQUIREMENT:

3.1 Short circuit protection:

No damage to the power supply shall be sustained when operating into a short circuit condition for an indefinite period of time. The power supply shall be self – recovering when fault condition removed.

3.2 Over Current protection:

The power supply shall provide over current protection on output. Maximum current inception point of output shall be Hiccup mode.

3.3 Over voltage protection:

The power supply shall provide over voltage protection on output. Maximum voltage inception point of output shall be Hiccup mode.

4.0 ENVIRONMENTAL CONDITIIONS

4.1 Operating

The power supply shall be capable of operating continuously in any mode without performance deterioration in the following environmental conditions.

4.1.1 Ambient Temperature: 0-40°C

4.1.2 Relative Humidity: 20% ~ 90%

4.1.3 Vibration: 1.0mm, 10 –25Hz, 15 minutes per cycle for each axis (X, Y, Z)

4.2 Non - operating:

The power supply shall be capable of standing the following environmental conditions extended periods of time, without sustaining electrical or mechanical damage and subsequent operational deficiencies:

4.2.1 Ambient Temperature:-20°C ~ 70°C

4.2.2 Relative Humidity: 20% ~ 90%

4.2.3 Vibration: 1.0mm, 10 –25Hz, 15 minutes per cycle for each axis (X, Y, Z)

5.0 RELIABILITY AND QUALITY CONTROL

5.1 MTBF

When the power supply is under normal operation within the limits of this specification the MTBF shall be at least 20,000 hours at 25°C.

5.2 Burn-In

The power supply will be burn-in for a minimum 4 hours at room temperature under full load.

5.3 Temperature Raising

Input voltage is AC 100V +/-10%, AC 240V +/-10%; output power is 100W (max) Test the power surface temperature raising. Need pass the following requirement:

5.4 Loading Consecutive Operation

When the unit is left with input voltage is AC 100V +/-10%; AC240V +/-10%. And Output power loading 100w(max). No special temperature raising and need pass item 2.0 specification.

6.0 SAFETY STANDARD

6.1 EMC standards

The power supply meets the radiated and conducted emission requirements for EN55022 Class A[Load 100W(max)] & FCC Part 15 CLASS A[Load 100W(max)].


6.2 Insulation resistance

Input to output: minimum 100MΩ at 500 VDC.

6.3 Dielectric Strength (Hi-Pot)

Primary to Secondary: AC 3000V, ≤ 10 mA, 1 minute for type test, 3 seconds for production test.

7.0 Test Circuit

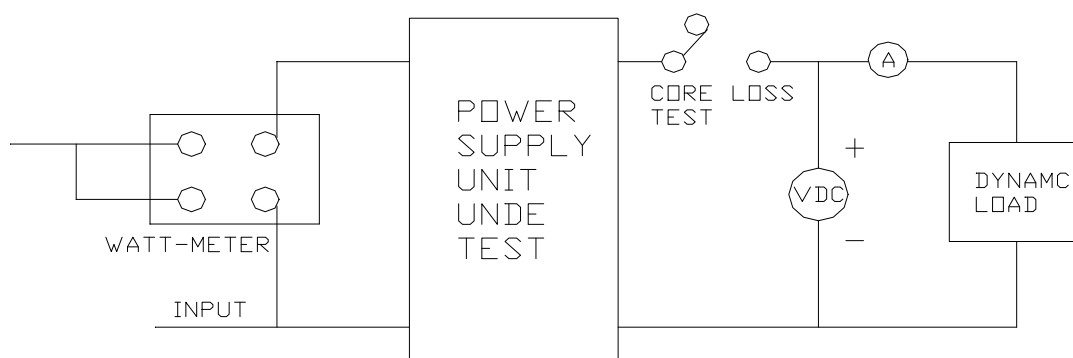

8.0 MECHANICAL

- 8.1 Plastic enclosure: Fire retardant plastic.
- 8.2 Physical Size:
 - US:72.5*72.5*32.3mm(L*W*H)
 - EU:109.5*72.5*32.3mm(L*W*H)
 - UK:90*72.5*32.3mm(L*W*H)
- 8.3 The weight of the power supply: Approx 200 g.

9.0 HOUSING ASSEMBLY DRAWING

